EZCast Opus

4K60Hz 無線顯示傳輸

C-2 & R-2

使用手冊

Rev 1.0



EZCast

產品資訊如有變更，恕不另行通知。

關於 EZCast Opus

發射器（C-2）

連接電腦或行動裝置，輕鬆鏡像螢幕上的顯示內容，適合觀看影片及分享想法。



無線顯示接收器（R-2）


將發射器傳送的 4K UHD 內容顯示於大螢幕上。



如何鏡像

1. 安裝無線顯示接收器

將無線顯示接收器 R-2 插入電視的 HDMI 接口，並透過 USB 連接獨立的 5V/1A 電源供應器供電。

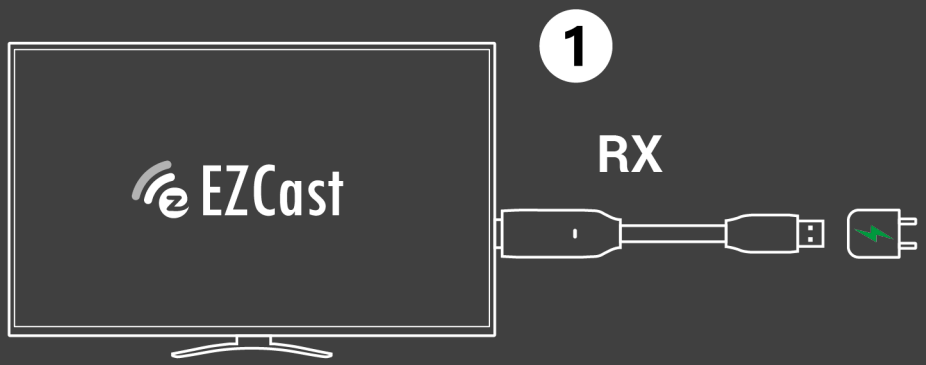


2. 發射器接上裝置即可開始投影

將發射器 C-2 插入電腦或智慧型裝置的 USB-C DP-Alt 接口。等待數秒，直到發射器上的指示燈停止閃爍並轉為恆亮，即會自動開始鏡像。

3. 停止 / 重新鏡像

按下發射器上方的按鈕，可停止或重新開始鏡像。

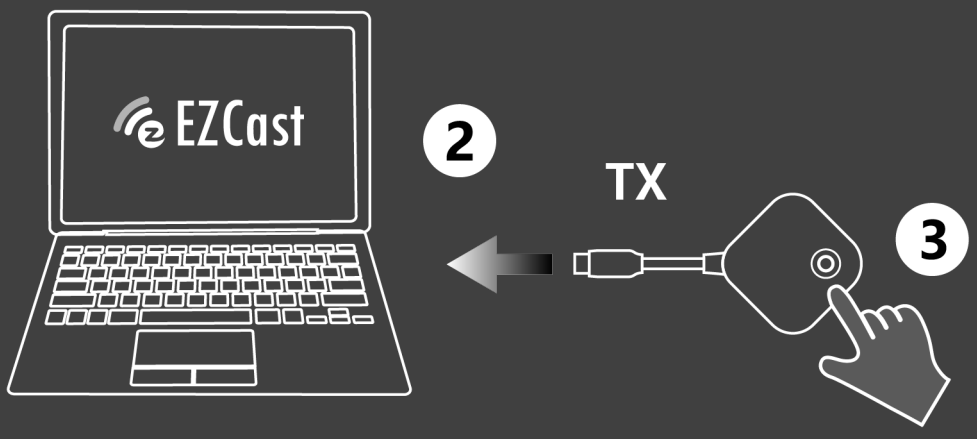


注意: *EZCast Opus 發射器支援所有具備 USB-C DP-Alt 接口的裝置進行鏡像。*

- *若要將接收器恢復原廠設定，請長按接收器上方按鈕 20 秒。*
- *若要將發射器恢復原廠設定，請快速按下發射器上方按鈕 5 次。*


如何配對發射器與接收器

1. 開啟接收器配對模式

(1) 使用外接電源供應器（5V/1A）為接收器供電，再將接收器插入螢幕的 HDMI 接口。

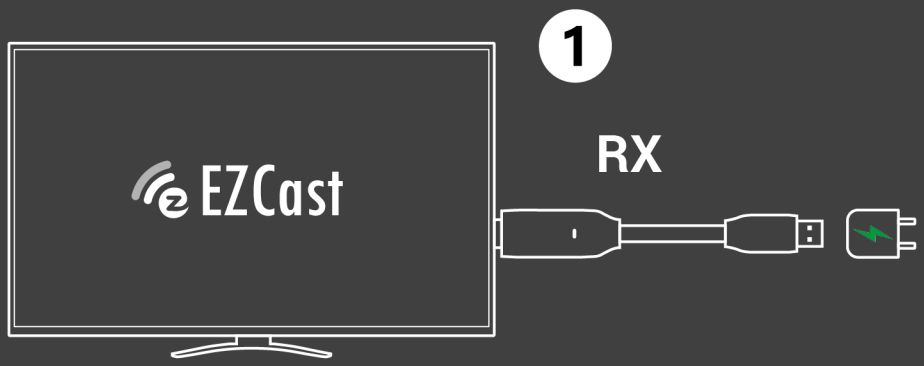


(2) 長按接收器上方按鈕 2 秒。當螢幕下方顯示「DisplayPass: Smart Pairing」時，放開按鈕。

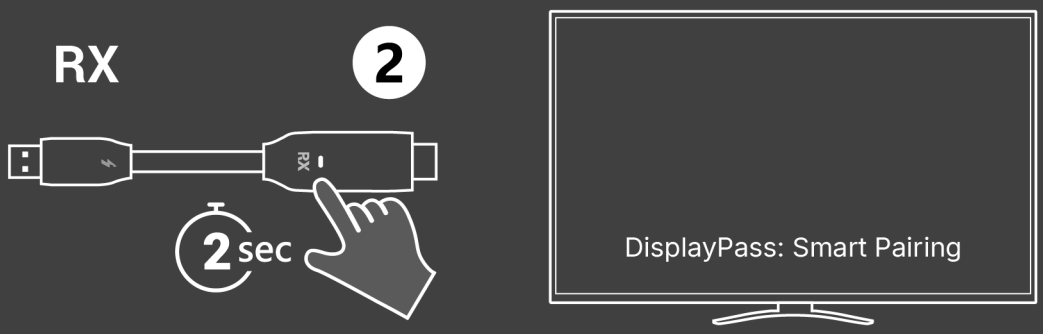


注意: *重新連接接收器電源時，系統也會自動啟動配對程序。螢幕將顯示「DisplayPass: Smart Pairing」約 2 秒，無須另外按下接收器上方按鈕。*

2. 按下發射器上方按鈕

(1) 將發射器插入電腦或行動裝置以供電。

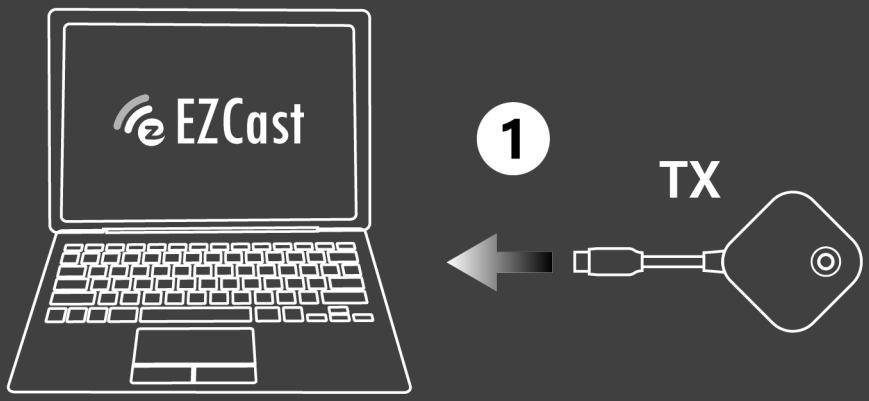

(2) 長按發射器上方按鈕，直到指示燈熄滅後放開。指示燈將快速閃爍，表示發射器已進入配對狀態。
等待自動配對完成後，系統將自動開始投影。

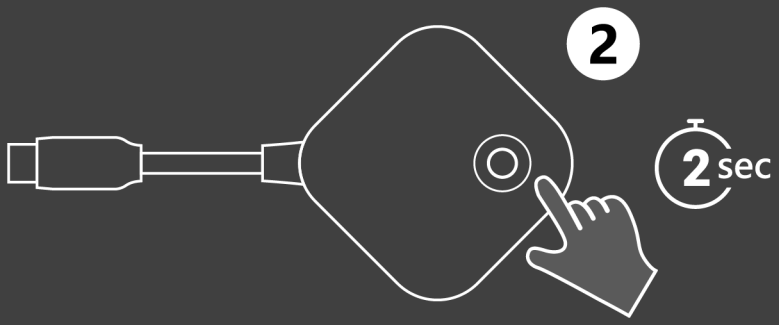


OTA 線上更新

1. 顯示接收器的 SSID 與 PSK

(1) 將接收器插入螢幕，並透過 USB 連接 5V/1A 電源供電。

(2) 在螢幕上確認接收器顯示的 SSID 與 PSK。若螢幕未顯示相關資訊，請快速按下接收器上方按鈕 3 次，以開啟並顯示配對頁面。

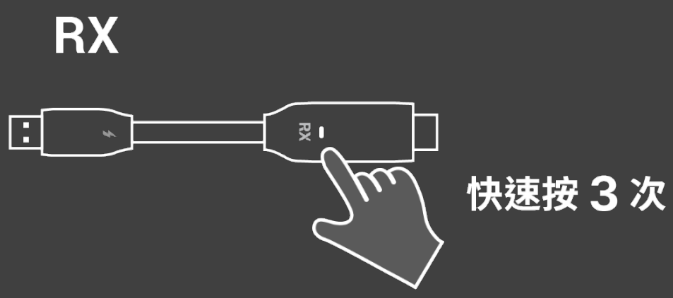

2. 將接收器連線至網路

(1) 開啟手機或電腦的 Wi-Fi 設定。

(2) 選擇螢幕上顯示的 SSID，並輸入 PSK 以完成連線。

(3) 開啟瀏覽器，在網址列輸入： 192.168.203.1

(4) 進入設定頁面，開啟網際網路設定，並將接收器連線至可存取網際網路的網路。

3. 透過網頁設定進行更新

(1) 確認螢幕上的 Wi-Fi 欄位，以及瀏覽器設定頁面的 Internet 欄位，皆顯示目前連線網路的 SSID。

(2) EZCast Opus 連線至網際網路後，返回設定頁面並選擇「Upgrade」。

(3) 系統將檢查目前版本。若有較新版本，請同意更新以完成系統升級。



產品資訊

發射器（C-2）

- 天線：1T1R（內建）
- 無線網路：5GHz
- 接口：USB-C DP-Alt

無線顯示接收器（R-2）

- 天線：1T1R（內建）
- 無線網路：5GHz
- 接口：HDMI

MIC 警語

注意：5GHz 頻段（W52）僅限室內使用。

NCC 警語

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

本產品為無線資訊傳輸設備 (U-NII)，1. 應避免影響附近雷達系統之操作。2. 高增益指向性天線只得應用於固定式點對點系統。

FCC statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference (2) this device must accept any interference received, including interference that may cause undesired operation.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this product not authorized by the manufacturer could void the electromagnetic compatibility (EMC) and wireless compliance and negate your authority to operate the product.
This product has demonstrated EMC compliance under conditions that included the use of compliant peripheral devices and shielded cables between system components. It is important that you use compliant peripheral devices and shielded cables between system components to reduce the possibility of causing interference to radios, television sets, and other electronic devices.

RF Exposure Statement (Receiver):

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

SAR statement (Transmitter):

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.
The SAR limit set by the FCC is 1.6W/Kg. For body-worn operation, this device has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and positions the device a minimum of 0mm from the body. RF exposure compliance with any body-worn accessory that contains metal was not tested and certified. And use of such body-worn accessory should be avoided. Accessory available in market and must be used to keep use distance 0mm from EUT to body-worn operation.