EZCast Opus

4K60Hz 无线显示传输

C-2 & R-2

使用手册

Rev 1.0



EZCast

本手册所提到的产品规格和信息仅供参考，如有变更，恕不另行通知。

关于 EZCast Opus


发射器（C-2）

连接电脑或移动设备，轻松镜像屏幕上的显示内容，适合观看视频及分享想法。



无线显示接收器（R-2）


将发射器传输的 4K UHD 内容显示在大屏幕上。

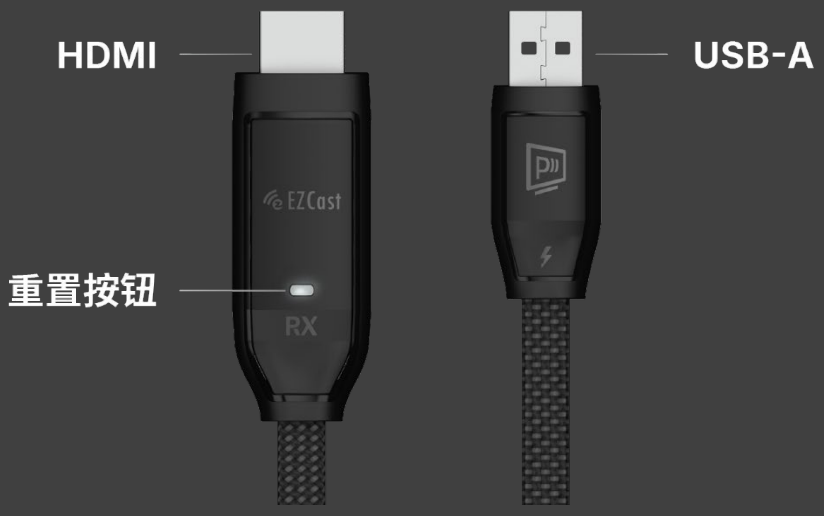

如何镜像

1. 安装无线显示接收器

将无线显示接收器 R-2 插入电视的 HDMI 接口，并通过 USB 连接独立的 5V/1A 电源适配器供电。

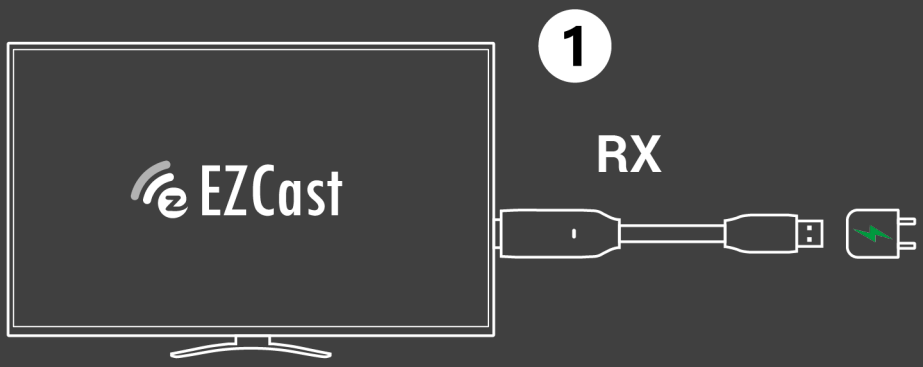


2. 发射器接上设备即可开始投屏

将发射器 C-2 插入电脑或智能设备的 USB-C DP-Alt 接口。等待数秒，直到发射器上的指示灯停止闪烁并转为常亮，即会自动开始镜像。

3. 停止 / 重新镜像

按下发射器上方的按钮，可停止或重新开始镜像。

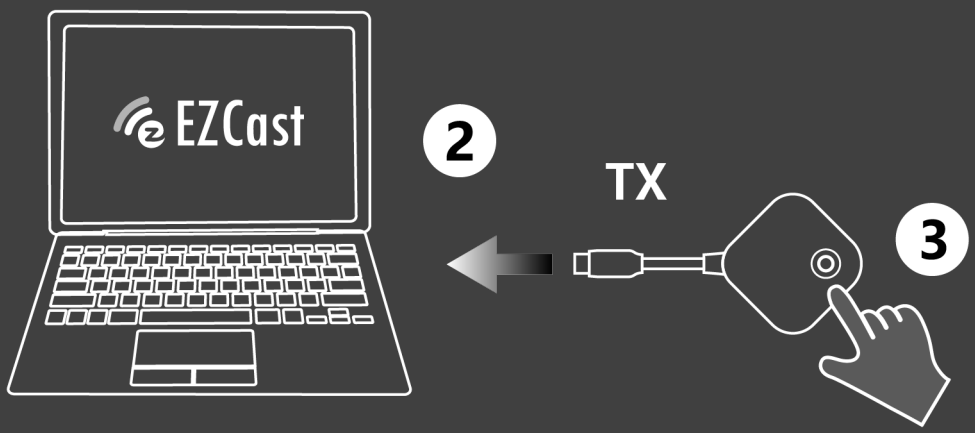


注意： *EZCast Opus 发射器支持所有配备 USB-C DP-Alt 接口的设备进行镜像。*

- *如需将接收器恢复出厂设置，请长按接收器上方按钮 20 秒。*
- *如需将发射器恢复出厂设置，请快速按下发射器上方按钮 5 次。*


如何配对发射器与接收器

1. 开启接收器配对模式

(1) 使用外接电源适配器（5V/1A）为接收器供电，再将接收器插入显示器的 HDMI 接口。

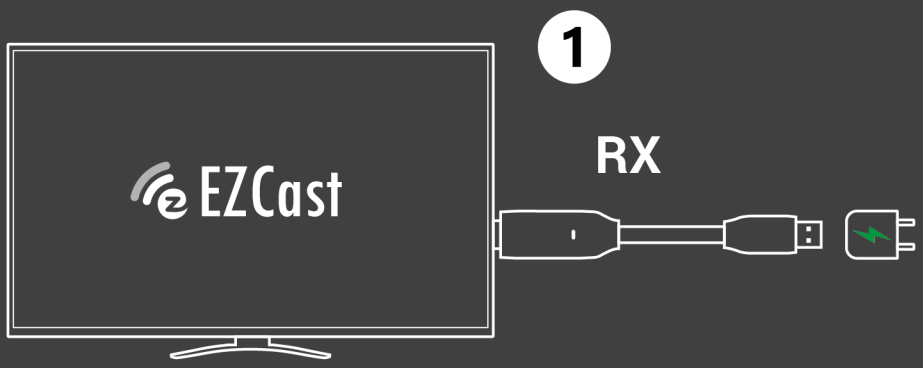


(2) 长按接收器上方按钮 2 秒。当屏幕下方显示「DisplayPass: Smart Pairing」时，松开按钮。

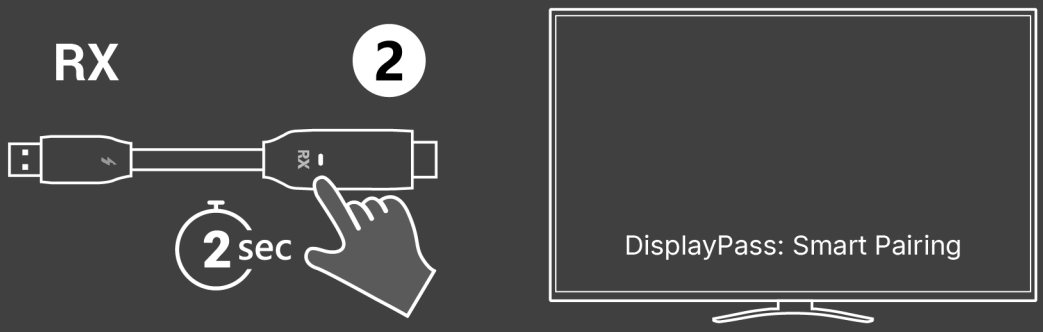


注意：*重新连接接收器电源时，系统也会自动启动配对程序。屏幕将显示「DisplayPass: Smart Pairing」约 2 秒，无需另外按下接收器上方按钮。*

2. 按下发射器上方按钮

(1) 将发射器插入电脑或移动设备以供电。

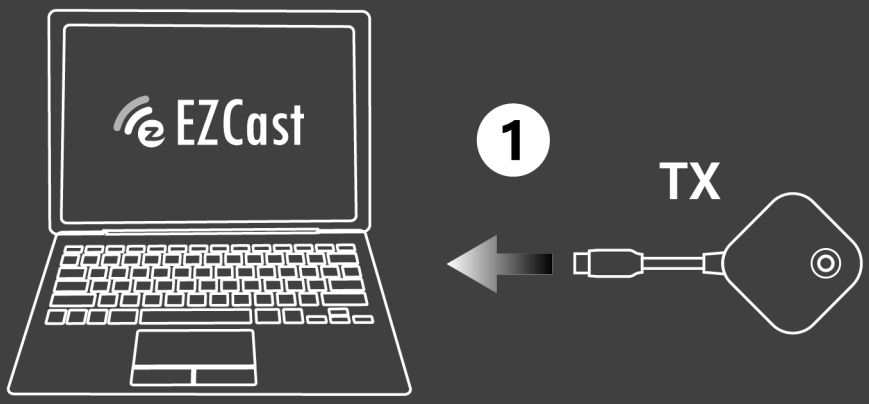

(2) 长按发射器上方按钮，直到指示灯熄灭后松开。指示灯将快速闪烁，表示发射器已进入配对状态。
等待自动配对完成后，系统将自动开始投屏。

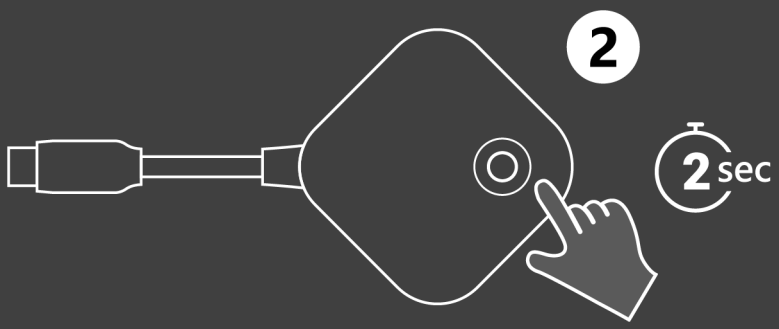


OTA 在线升级

1. 显示接收器的 SSID 与 PSK

(1) 将接收器插入显示器，并通过 USB 连接 5V/1A 电源供电。

(2) 在屏幕上确认接收器显示的 SSID 与 PSK。若屏幕未显示相关信息，请快速按下接收器上方按钮 3 次，以开启并显示配对页面。

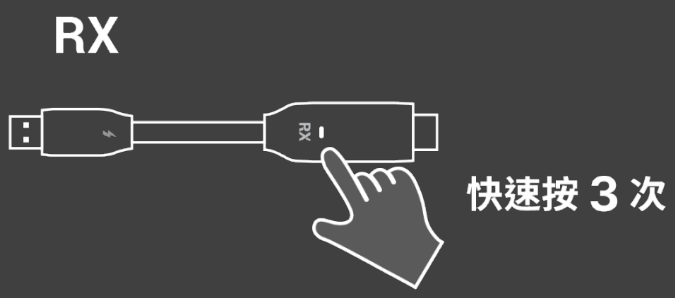

2. 将接收器连接至网络

(1) 开启手机或电脑的 Wi-Fi 设置。

(2) 选择屏幕上显示的 SSID，并输入 PSK 以完成连接。

(3) 打开浏览器，在地址栏输入： 192.168.203.1


(4) 进入设置页面，开启互联网设置，并将接收器连接至可访问互联网的网络。

3. 通过网页设置进行升级

(1) 确认屏幕上的 Wi-Fi 栏位，以及浏览器设置页面中的 Internet 栏位，均显示当前连接网络的 SSID。

(2) EZCast Opus 连接至互联网后，返回设置页面并选择「Upgrade」。

(3) 系统将检查当前版本。若有较新版本，请同意更新以完成系统升级。

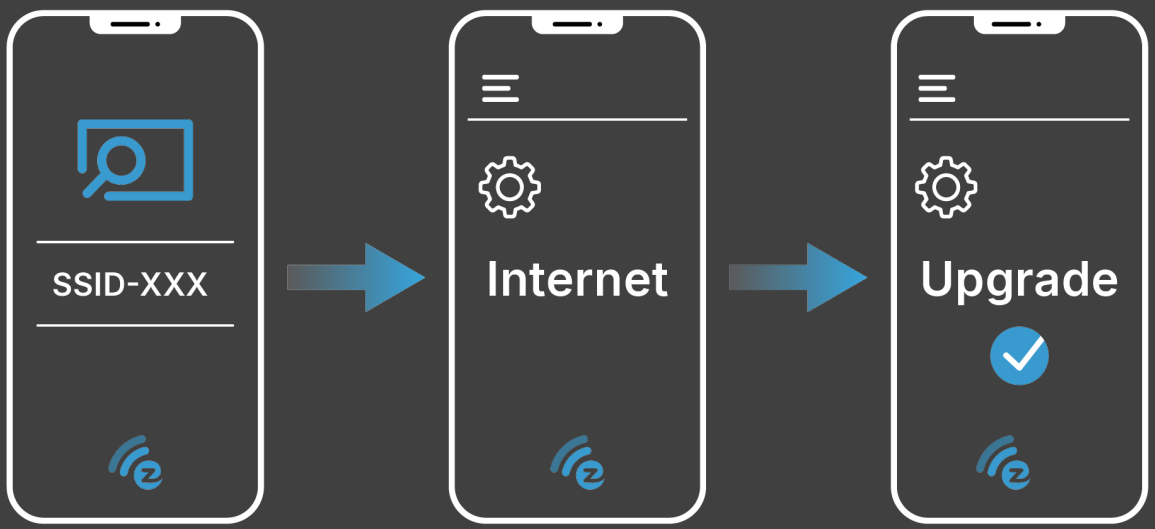

产品参数

发射器（C-2）

- 天线：1T1R（内置）
- 无线网络：5GHz
- 接口：USB-C DP-Alt

无线显示接收器（R-2）

- 天线：1T1R（内置）
- 无线网络：5GHz
- 接口：HDMI

MIC 警语

注意：5GHz 频段（W52）仅限室内使用。

NCC 警语

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

本產品為無線資訊傳輸設備 (U-NII)，1. 應避免影響附近雷達系統之操作。2. 高增益指向性天線只得應用於固定式點對點系統。

FCC statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference (2) this device must accept any interference received, including interference that may cause undesired operation.
Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.
If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to this product not authorized by the manufacturer could void the electromagnetic compatibility (EMC) and wireless compliance and negate your authority to operate the product.
This product has demonstrated EMC compliance under conditions that included the use of compliant peripheral devices and shielded cables between system components. It is important that you use compliant peripheral devices and shielded cables between system components to reduce the possibility of causing interference to radios, television sets, and other electronic devices.

RF Exposure Statement (Receiver):

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

SAR statement (Transmitter):

This device meets the government's requirements for exposure to radio waves. This device is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government.
The SAR limit set by the FCC is 1.6W/Kg. For body-worn operation, this device has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and positions the device a minimum of 0mm from the body. RF exposure compliance with any body-worn accessory that contains metal was not tested and certified. And use of such body-worn accessory should be avoided.
Accessory available in market and must be used to keep use distance 0mm from EUT to body-worn operation.